SURVEY DATA:

- *RAW PILE VOLUME PILE 1= 3436 m^3*
- *RAW PILE VOLUME PILE 2= 5714 m^3*
- *RAW PILE VOLUME PILE 3= 6414 m^3*
- *NO COMPACTION OR EXPANSION FACTOR HAS BEEN USED*
- *CONTOUR INTERVALS ARE 0.25m*

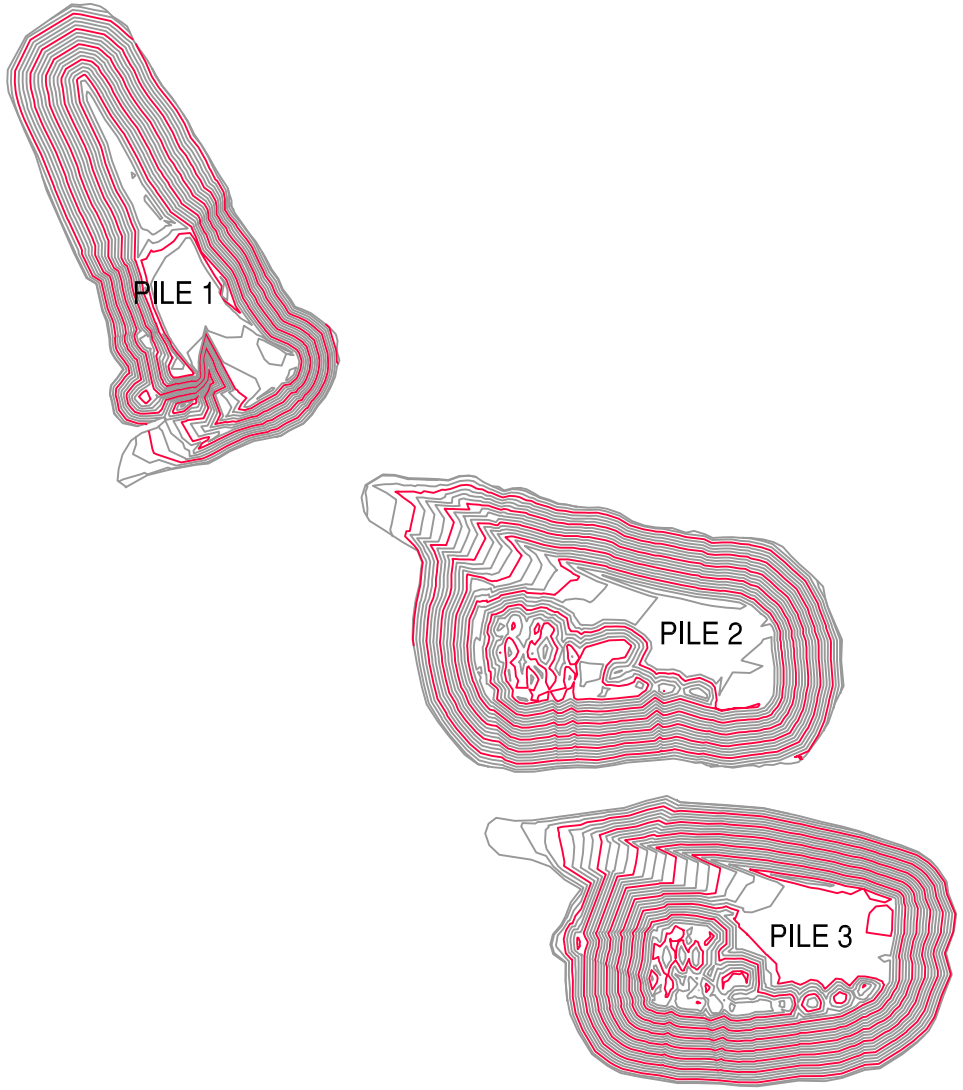

The location of the features certified by this plan have been determined from existing survey monumentation and does not purport to be a location certified in relation to the property boundaries.

NOTE: Elevations are derived from an assumed datum.

No.	MM/DD/YY DATE	BY	REVISION	Chk'd

LEGEND

- PP POWER POLE
- GUY WIRE
- FENCE LINE
- TREE
- SURVEY CONTROL
- YT2563 YELLOW TAG #
- 350.1 EXISTING GRND ELV.
- LAMP STANDARD
- CABLE VAULT
- HYDRO VAULT
- JUNCTION BOX
- TEL VAULT
- CURB STOP
- HYDRANT
- WATER VALVE
- SIGN
- SAN SANITARY MH
- STM STORM MH
- DW DRYWELL
- SAN. SERVICE
- STM. SERVICE
- WATER SERVICE
- CATCH BASIN

PIN POINT SURVEYING, LTD.
3141 1St. Ave. NE,
Salmon Arm;
(250) 832-6220

CLIENT:

PROJECT: VOLUMETRIC SURVEY AND CONTOUR PLAN

DRAWN BY:	CK
DATE:	NOVEMBER 06, 2006
SCALE:	1:1000
DWG NAME	PLOT PLAN
DRAWING NO.	1 of 1